

OFFICE OF THE MARION COUNTY SURVEYOR
SECTION RECORD CORNER

SECTION 5 TOWNSHIP 16 RANGE 4

DATE: 8-1-04

PARTY CHIEF: Wilcoxon

CREW: _____

TYPE OF MARKER: Harrison



METHOD OF ESTABLISHMENT: County: 10-10-97

IN. S.P.C. E ZONE NAD '83

NAME: 16040501

N: 513037.8411(m)

E: 61018.6237(m)

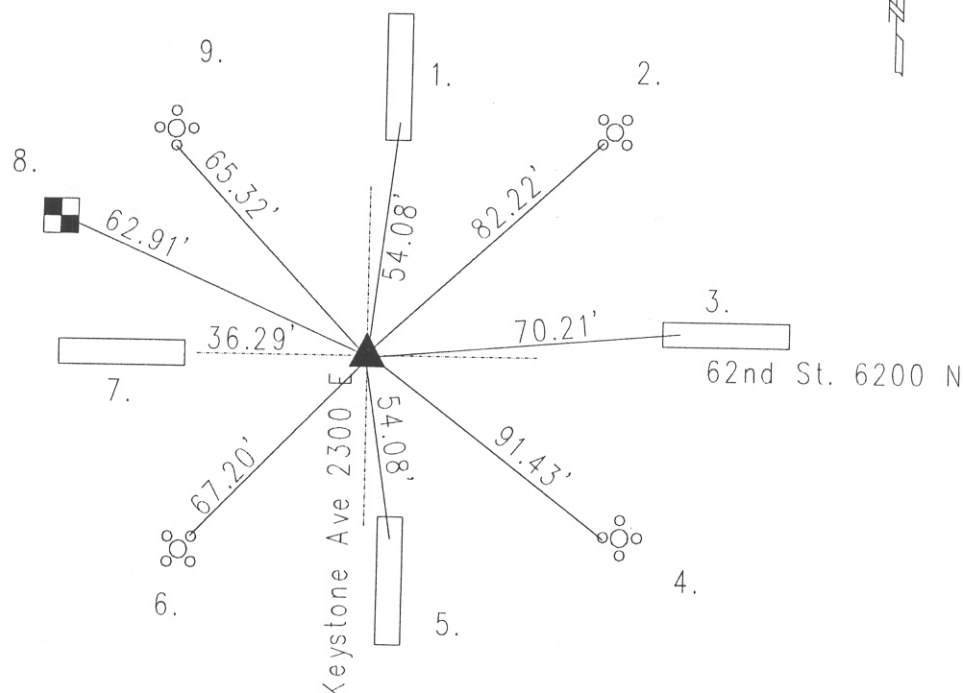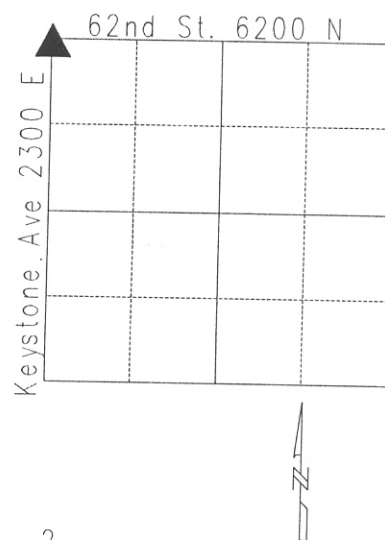

Original post set 1820 by Hendricks with witness: 8" hickory N 38 W 24 links, 14" elm S 35 E 37 links per Marion County Atlas pg. 11. Julian 3-23-1892 called no stone nor witness per Washington Township Legal Survey Book pg. 37. MCSO 6-12-47 called 2" galvanized washer. MCSO 4-27-48 called same. MCSO 1-17-58 called PK nail. Monroe 5-1-58 called same. Hankins 2-25-59 called brass plgu. Wilcoxon 11-21-75 called same. Wilcoxon 3-10-92 excavated corner set Harrison. Re-tied 10-10-97 by Wilcoxon. Re-tied 8-1-04 by Wilcoxon. 16040501

REF.	DISTANCE	DESCRIPTION
1.	54.08'	Cut 'x' in median
2.	82.22'	Cut 'x' SW bolt of aluminum pole base
3.	70.21'	Cut 'x' in median
4.	91.43'	Cut 'x' in W bolt of aluminum pole base
5.	54.08'	Cut 'x' in median
6.	67.20'	Cut 'x' NE bolt of aluminum pole base
7.	36.29'	Cut 'x' in median
8.	62.91'	Center of R/W marker
9.	65.32'	Cut 'x' S bolt of aluminum pole base